


-dV NiCd/NiMH BATTERY CHARGERS

Ni0610020 6-10c 2A -dV

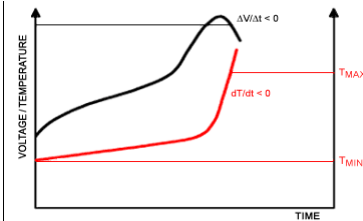

- -dV charge control
- Small in weight and size
- Switch mode
- Desktop unit
- Safety timer

Article number	10201 - Ni0610020
Main Input	100-240VAC 50-60Hz 45VA
Nominal battery voltage	7,2-12V (6 to 10 cells)
Constant charge current	2A (+0.15A)
End charge	by -ΔV(about 10mV) detection
Trickle charge current	100mA (0.05C)
Safety timer	10 hours
Efficiency	75% typical
LED indication	Red = Charging Green = Ready
Protection	Safety timer control Short circuit proof Against reverse polarity
Operating ambient temperature	0 to +40°C
Storage ambient temperature	-40 to +70°C
Approvals	CE
LED Indication	Red / Green
Output terminals	Female Tamiya (others on request)
Case material	Plastic case
Weight	200 g
Dimensions (LxWxH)	120 x 60 x 39mm

WWW.LANDMAN.TECH