


3-STEP LEAD BATTERY CHARGER

Pb12005P 12V 0,5A



- 3-Phase charge control
- Small in weight and size
- Switch mode
- Plug-in unit

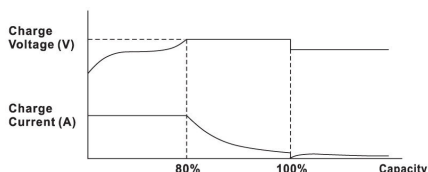

Article number	10058 - Pb12005P
Main Input	100-240VAC 50-60Hz 15VA
Nominal battery voltage	12V
Constant charge current (Stage 1)	0,5A max.
Charging voltage (Stage 2)	14,5V ± 0,2V
Trickle charge voltage (Stage 3)	13,7V ± 0,15V
Cut-off current (Stage 2→3)	< 0,2A
Efficiency	75% typical
No load output voltage	14,7V
Ripple current	200mA
Leak current	≤ 10mA
Protection	Short circuit proof Against reverse polarity
Operating ambient temperature	0 to +40°C
Storage ambient temperature	-40 to +70°C
Approvals	CE
LED Indication	Red / Green
Output terminals	Push-on terminals (others on request)
Case material	Plastic case
Weight	98 g
Dimensions (LxWxH)	72 x 47 x 27mm

WWW.LANDMAN.TECH