


3-STEP LEAD BASED BATTERY CHARGERS**CP24015T 24V 1,5A**

- 3-Phase charge control
- Small in weight and size
- Switch mode
- Desktop unit

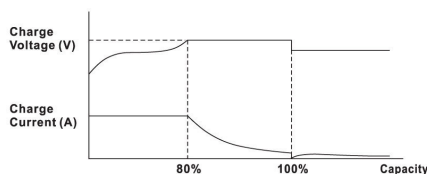

Article number	10106 - CP24015T
Main Input	100-240VAC 50-60Hz 60VA
Nominal battery voltage	24V
Constant charge current (Stage 1)	1,5A max.
Charging voltage (Stage 2)	29,1V ± 0,3V
Trickle charge voltage (Stage 3)	27,3V ± 0,3V
Cut-off current (Stage 2→3)	< 0,3A (± 0,05A)
Efficiency	80% typical
No load output voltage	29,1V
Ripple current	400mA
Cooling	Natural convection cooling
Protection	Short circuit proof
	Against reverse polarity
Operating ambient temperature	-10 to +40°C
Storage ambient temperature	-40 to +70°C
Approvals	CE / UL1310, EN60335-2-29 / EMC EN55014
LED Indication	Red / Green
Output terminals	Push-on terminals (others on request)
Case material	Plastic case
Weight	350 g
Dimensions (LxWxH)	120 x 60 x 38mm