

Technical specifications


Alkaline

Powerline

Panasonic Typical Dimensions



6LR61AD

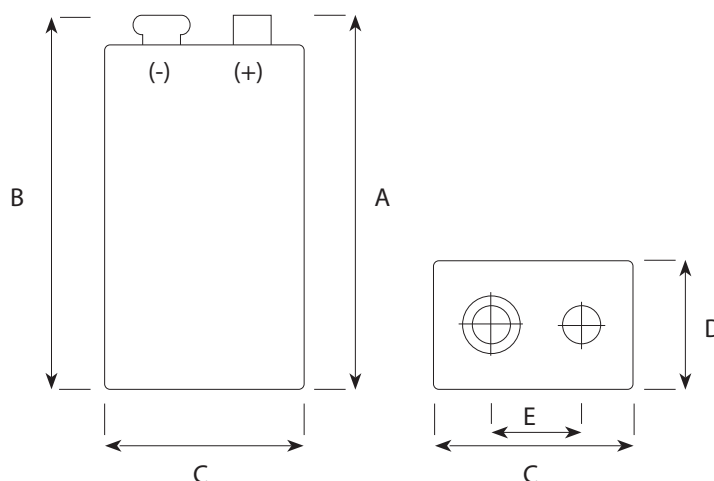

Dimension	IEC Dimensions (mm)		Panasonic Dimensions (mm)
	Maximum	Minimum	Typical
A	48,5	46,5	48,0
B	46,4		44,2
C	26,5	24,5	25,6
D	17,5	15,5	16,5
E	12,95	12,45	12,7

Specifications

Name	9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	9 Volt
Electrolyte	Potassium Hydroxide
Average weight	44,3 g
Storage temp. range	+10°C ~ +25°C
Operating temp. range	-20°C ~ +45°C
Average Impedance	+/- 2,3 Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EC directive 91/157EC & 98/101EC
Recommended cut off voltage	4,8V per battery

For more information:

www.panasonic-industrial.com

Panasonic
ideas for life

Typical discharge values

6LR61AD

