

Data Sheet <sup>1.)</sup>

<b>Type Number:</b>	55945	
<b>Sytem:</b>	Nickel Metal Hydride/ KOH Electrolyte	
<b>Nominal Voltage [V]:</b>	1.2	
<b>Nominal Capacity C [mAh]:</b>	450	
<b>Typical Capacity C [mAh]:</b>	450	
	at 90 mA / 1.00 V	
<b>Weight, approx. [g]</b>	12.5	
<b>Dimensions [mm]:</b>	<b>min.</b>	<b>max.</b>
<b>Length [l]:</b>	23.9	24.1
<b>Width Facing [w]:</b>	33.9	34.1
<b>Height [h]:</b>	5.1	5.6

<b>UL Recognition:</b>	MH 13654 (N)	
<b>Coding:</b>	Manufacturing 5 digit code (123 = day/4 = year/ 5 = version)	

<b>Temperature Ranges [°C]</b>	<b>min.</b>	<b>max.</b>
<b>Storage:</b> less than 30 days	-40	65
<b>Discharge:</b>	-20	65
<b>Charge:</b>	0	65

<b>Charging Method:</b>	
<b>Normal Charging:</b>	45 mA for 14 – 16 h
<b>Accelerated Charging (20°C):</b>	135 mA for 4 h
	Time controlled, voltage control recommended
<b>Fast Charging: (20°C)</b>	450 mA for - h *
<b>Trickle Charging:</b>	4.5 mA
<b>Overcharge (20°C):</b>	13.5 mA up to 12 months 45 mA up to 6 months

<b>Charge Retention [%] at 20°C:</b>	80
	Capacity available after 1 month Storage at 20°C


<b>Internal Resistance [Ohm]:</b>	0.14
	at charged cells, 20°C, DC: 0.2 CA/2 CA, (IEC 61951-2)

<b>Impedance [Ohm]:</b>	0.02
	at charged cells, 20°C, AC: 1kHz, (IEC 61951-2)

<b>Typical Capacities [mAh]:</b>	
at 450 mA / 0.9 V	430
at 1.35 A / 0.9 V	360

<b>Max. Discharge Current (cont.) [mA]:</b>	2500
---	------

<b>Life Expectancy (typical):</b>	
<b>IEC Cycle:</b>	1000 Cycles (IEC 61951-2)
<b>Trickle Charge:</b>	up to 5 years (20°C)

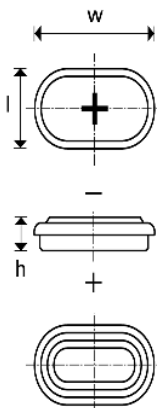

\* (-dv=5-10 mV/ cell; dT/ dt=0.7°C/min)

Capacities based on normal charging

<sup>1.)</sup> Prior to use read Rechargeable NiMH Button Cell handbook @ [www.varta-microbattery.com](http://www.varta-microbattery.com)